

This document gives a complete list of technical data with some detailed explanations of the main systems, subsystems and performance of our generators, in order to support local sales documentation, tenders or even technical doubts.

While every effort has been made to ensure that the information in this manual is correct Atlas Copco does not assume responsibility for possible errors. Atlas Copco reserves the right to make changes without prior notice.



### Standard Model Scope

Applying insights gained from industrial customers, rental companies, public utilities and other end users QAS generators are designed to withstand the most demanding on-site conditions and environments.

Considering their impressive performance at full capacity, the QAS line of generators includes excellent features for noise reduction and environmental protection.

QAS generators are purpose built for quick, easy and safe transport and on-site handling. Built to last, a QAS generator will provide years of dependable service for your electrical power generation needs. All members of the widely appreciated QAS family are intelligent multi-task units managing to power a wide range of electrical equipment in different applications.

Their superior component configuration offers a wide range of control modules, electrical settings and mechanical options, in order to guarantee superior quality at efficient operating costs.

Conceived for 100% prime power operation in the most severe outdoor conditions, ready to work in sensitive areas, QAS generators are designed and configured for safe operation with minimal downtime under any circumstance.

### Features

- Carefully selected components, accurately developed and tested configuration
- Superior standard configuration and extensive option list
- 500 hours service interval and superior accessibility to all service points
- Compact and safe concept and sturdy design
- Designed and built to last

### Benefits

- Accurate and stable power regardless of the conditions
- Ability to power a wide range of applications
- Service efficiency: increased up-time
- Increased transport efficiency
- Superior resale value / longer life time

### Manufacturing and Environmental Standards

The QAS range is manufactured following stringent ISO 9001 regulations, and by a fully implemented Environmental Management System fulfilling ISO 14001 requirements.

Attention has been given to ensure minimum negative impact to the environment. The QAS range complies with the latest noise emission directives.

### Declaration of Conformity

Our QAS EC falls under the provisions of the article 12.2 of the EC Directive 2005/42/EC on the approximation of the laws of the Member States relating to machinery, is in conformity with, the relevant Essential Health and Safety Requirements of this directive:

**MACHINERY SAFETY (2006/42/EC):** EN ISO 12100-1, EN ISO 12100-2, UNE EN 12601

**ELECTROMAGNETIC COMPATIBILITY (2004/108/EC):** EN 61000-6-5, EN 61000-6-4

**LOW VOLTAGE EQUIPMENT (2006/95/EC):** EN 60034, EN60204-1, EN 60439

**OUTDOOR NOISE EMISSION (2000/14/EC):** ISO 3744

**ISO 8528:** QAS generators are design to comply with ISO 8528 regulation



## 1. Performance Data

Generator		QAS 20 Kd S3A	
Rated speed	rpm	1500	1800
Rated power factor (lagging)		0.8	0.8
Rated Prime Power, PRP	kVA	20	24.2
	kW	16	19.4
Limited Time Power, ESP (Stand-by)	kVA	22	26.6
	kW	17.6	21.3
Continuous Operation Power, COP (Continuous)	kVA	20	24.2
	kW	16	19.4
Rated voltage (3ph. line to line)	V	400	480
Rated voltage (1ph. line to neutral)	V	230	277
Rated current 3ph. (PRP)	A	28.9	29.1
Rated current 3ph. (ESP)	A	31.8	32.0
Maximum sound power level (LWA) complies with 2000/14/EC	dB(A)	88	92
Maximum sound pressure level (LPA) at 7 m	dB(A)	60	64
Coupling engine/alternator			Direct
Capacity fuel tank (total)	l		115
Fuel tank specifications			Plastic
Fuel Autonomy at full load (Considering full capacity)	h	23.5	21.35
Single step load acceptance (within G2, acc. ISO 8528-5:1993)	%		100
Frequency drop (lower than % isochronous)	%		≤0.05
Maxim oil consumption 100% load	l/h	0.02	0.03

## Derating Table (%)

	0°C	5 °C	10 °C	15 °C	20 °C	25 °C	30 °C	35 °C	40 °C	45 °C	50 °C
0 m	100	100	100	100	100	100	95	95	95	90	90
500 m	100	100	95	95	95	90	90	90	85	85	85
1000 m	95	90	90	85	85	85	85	80	80	80	75
1500 m	85	85	85	80	80	80	80	75	75	75	70
2000 m	80	80	80	75	75	75	70	70	70	65	65
2500 m	75	75	70	70	70	70	65	65	65	NA	NA
3000 m	70	70	65	65	65	65	60	60	60	NA	NA
3500 m	65	60	60	60	60	60	55	NA	NA	NA	NA
4000 m	60	60	55	55	55	55	55	NA	NA	NA	NA

## Limitations

Limitations		QAS 20 Kd S3A	
Maximum ambient temperature	°C		50
Altitude capability	m		4000
Relative air humidity maximum	%		85
Minimum running temperature	°C		-15
Minimum running temperature, with coldstart equipment and opened breather*	°C		-25

\* on high humidity regions freezing may occur on the *breather pipes*

## Application Data



Application Data		QAS 20 Kd S3A	
Mode of operation			PRP
Max. Inclination			+/- 20°
Operation			single
Start-up and control mode			manual / auto
Climatic exposure			open air



**QAS 20 Kd S3A**

	rpm	1500	1800
<b>Fuel Consumption at*:</b>			
0% Load	l/h	1.18	1.47
10% Load	l/h	2.08	2.12
25% Load	l/h	2.25	2.88
50% Load	l/h	3.17	3.67
75% Load	l/h	3.79	4.71
100% Load	l/h	4.90	5.39
110% Load	l/h	5.36	6.63
<b>Specific Fuel Consumption at:</b>			
0% Load	kg/kWh	NA	NA
10% Load	kg/kWh	1.117	0.941
25% Load	kg/kWh	0.485	0.511
50% Load	kg/kWh	0.340	0.326
75% Load	kg/kWh	0.271	0.279
100% Load	kg/kWh	0.263	0.239
110% Load	kg/kWh	0.262	0.268

\*Diesel fuel type No. 2 diesel or a fuel corresponding to ASTM D2. Density: 0,86 kg/l

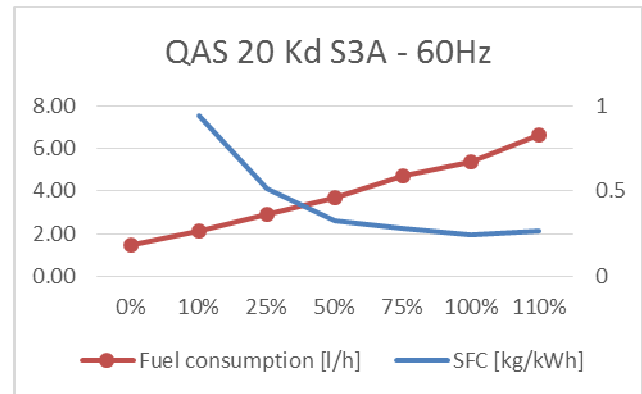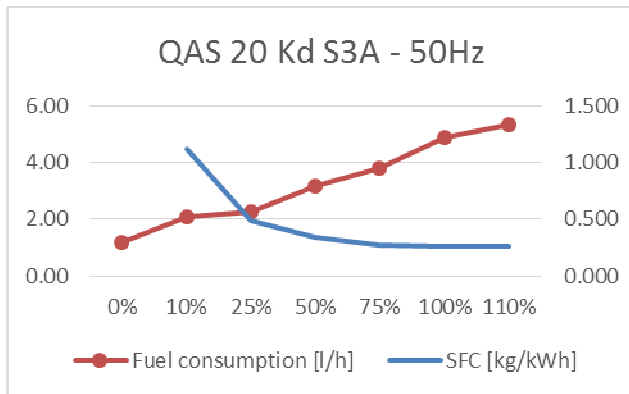


(Reference conditions at 25°C Air Inlet Temperature, 60% Relative Humidity, 1bar Absolute inlet pressure, for different conditions or limitations contact Atlas Copco technical support).



2. Box

QAS 20 Kd S3A			
	rpm	1500	1800
<b>Dimensions (L x W x H)</b>	m	1,78 x 0,87 x 1,16	
<b>Weight</b>			
Net mass	Kg	696	
Wet mass	Kg	793	
<b>Capacity of spillage free frame</b>	l	143.44	
<b>Dimensions Long autonomy Fuel tank</b>			
<b>Weight</b>			
Net mass	Kg	-	
Wet mass	Kg	-	
<b>Foam silencer</b>			
Thickness	mm	30	
Temperature	°C	Min -30 Max 120	

Our canopies are made from galvanized steel and painted with powder coating paint. To improve the protection in the most exposed parts as frame and lifting beam, it is also primed with a special paint before coating.

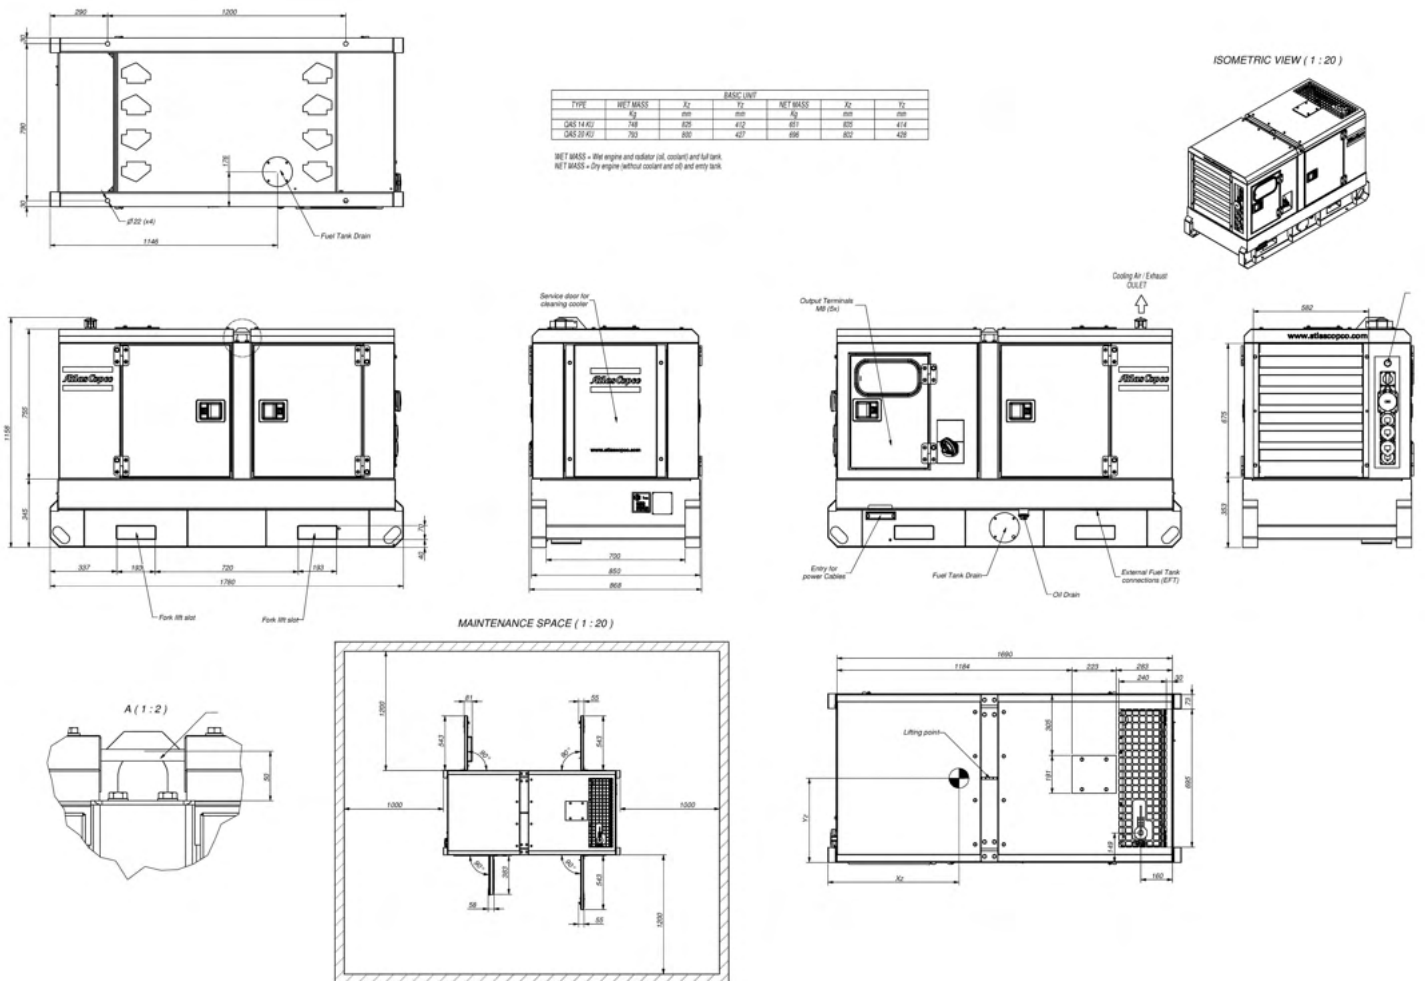

### 3. Engine

#### QAS 20 Kd S3A

	rpm	1500	1800
<b>General</b>			
Manufacturer		Kubota	
Model		V2403M-BG	
Standard		ISO 3046 / ISO 8528-2	
Number of cylinders	u.	4	
Configuration		4 cycle vertical	
Aspiration		Natural	
Speed governor		Electronic	
Bore	mm	87	
Stroke	mm	102.4	
Electrical system (DC)	V	12	
Compression ratio		23.2	
Displacement (swept volume)	l	2.4	
Piston speed	m/s	NA	
Combustion system		Indirect injection	
Charged air cooling system		-	
Maximum permissible load factor of PRP during 24h	%	100	
<b>Lubrication system</b>			
Type		PAROIL E (Mineral)	
Capacity of oil system (including filters + sump)	l	7	
Oil pressure at rated speed	kPa	245 - 343	
Maximum Lubrication oil temperature	°C	125	
<b>Air intake system</b>			
Air consumption 25°C (PRP)	m³/min	1.6	1.9
Air consumption 25°C (ESP)	m³/min	1.6	1.9
Max allowable air intake restriction	kPa	2	
Air filter cleaning efficiency	%	99.8%	
Air filter capacity	m³/min	-	
<b>Cooling system</b>			
Coolant		Parcool	
Capacity of engine	l	8.4	
Total capacity (radiator, hoses...)	l	9	
Fan power consumption at nominal speed	kW	0.5	
Fan material		Plastic	
Coolant flow	l/s	0.8	1
Air mass flow (25°C)	m³/s	0.75	0.85
<b>Fuel filter</b>			
		Water Separator	
Max pressure	bar	2.07	
Temperature	°C	-40 to 121	
Volume	l	NA	
Flow Rate	l/h	170	
<b>Emission compliance</b>			
		EU STAGE 3A	
No X + HC	g/kWh	NA	6.867
CO	g/kWh	NA	0.656
PM	g/kWh	NA	0.27
SO2	g/kWh	NA	6,8 ppm
CO2 (at optimal working point)	%	NA	NA

\*These values are extracted from official engine datasheet.



#### 4. Alternator

##### QAS 20 Kd S3A

	rpm	1500	1800
<b>General</b>			
Manufacturer		Leroy Somer	
Model		LSA 40 M5	
Standard		IEC 34-1 / ISO 8528-3	
Rated net power (ESP: 50Hz 27°C / 60 Hz 40°C)	kVA	22	22
Number of bearings		1	
Number of wires		12	
Voltage regulator accuracy		+/-1%	
Degree of protection / Insulation class		IP 23/H	
Environment Protection		System 2 (Humid atmosphere)	
Number of poles		4	
Number phases		3	
Over speed	rpm	2250	
Air flow	m³/s	0.06	0.06
Total Harmonic Distortion THD		no load < 3%-linear load < 5%	
Waveform: NEMA = TIF		< 50	
Xd Direct axis synchro reactance unsaturated	%	193	193
X'd Direct axis transient reactance saturated	%	15.4	15.4
X''d Direct axis subtransient reactance saturated	%	7.7	7.7
<b>Excitation system</b>			
Sustained short-circuit current	%	180% (1,8x In)	
Time sustained short-circuit current	s	20	
<b>AVR</b>			
Model		R 220	
Sensing		1 phase	
Voltage regulation	%	±0.5	
Voltage sensing	V	≤140	

The Leroy Somer LSA alternators are designed for heavy duty continuous applications:


- System 2 protection (relative humidity >95%) for tropical environment (except coastal areas). With high performance dielectric varnish and reinforced over-coating on main stator and rotor
- 4 pole brushless design with single bearing, Class H insulation and IP23 rating
- Voltage regulation +/- 0.5%
- Full Load acceptance of prime power rating
- Standard excitation system is SHUNT (Self excited). As option (check Electrical options) you can have additional excitation system as:
  - PMG
  - Auxiliary winding



### 5. Generator

QAS 20 Kd S3A			
	rpm	1500	1800
<b>Energy Balance</b>			
<b>Engine</b>			
Heat rejection to exhaust	kW	14.6	17.7
Heat rejection to coolant	kW	13.7	16.6
Heat rejection to radiation	kW	1.3	1.6
<b>Alternator</b>			
Efficiency at full load	%	87.10%	

### Genset Efficiency

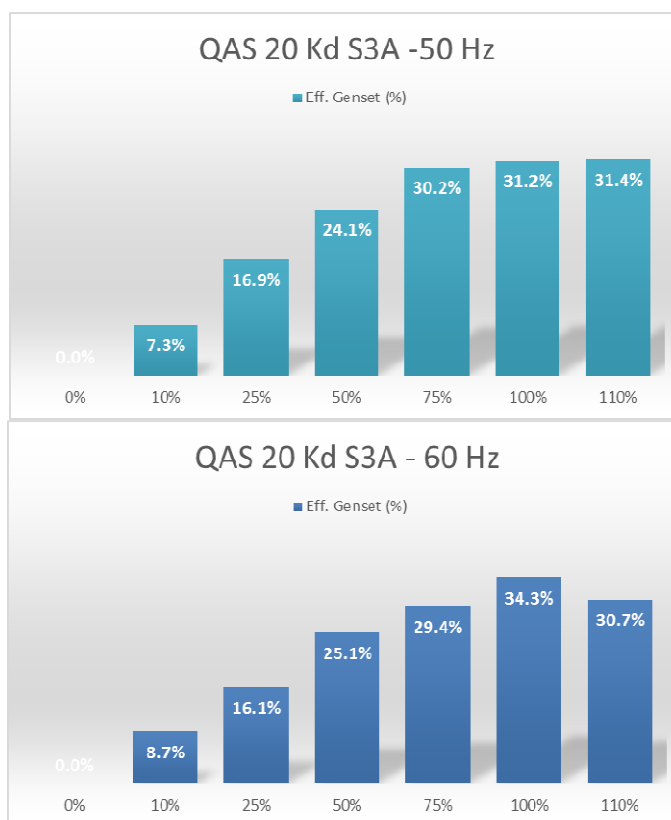

<b>Exhaust System</b>			
Flow (PRP)	m <sup>3</sup> /min	2.48	3.23
Flow (ESP)	m <sup>3</sup> /min	2.48	3.23
Exhaust gas temperature "after turbine" (PRP)	°C	490	
Exhaust gas temperature "after turbine" (ESP)	°C	490	
Max. Backpressure (Without / with spark arrestor)	kPa	7 / -	
Output pipe diameter	mm	50.0	
<b>Battery</b>			
Quantity		1	
Voltage	V	12	
Capacity	Ah	74	
Connection		-	
Dimensions (L x W x H)	mm	278x175x190	



	rpm	QAS 20 Kd S3A	
		1500	1800
Cold cranking current	A(EN) / A(DIN)	680 / -	
Starting power	kW	-	
Weight (wet)	kg	16.6	
<b>Sensor</b>			
Oil (temp, pressure & level)		STD	
Coolant (temp & level)		STD	
Fuel (feed pressure)		NA	
Charge air (temp & pressure)		NA	
Fuel Level		STD	
Water in Fuel		STD	
Generator Voltage		STD	
Mains Voltage		NA	
Generator Current transformer		STD	
Transformer Maintenance Changeover feedback		NA	
Reply: Mains CB opened/closed		NA	
Reply: Generator CB opened/closed		NA	
Air Inlet Pressure Switch		NA	
Low Coolant Level Shutdown/Warning		NA	

\*Confirm with Atlas Copco technical support.

## 6. Power Output

	rpm	QAS 20 Kd S3A	
		1500	1800
<b>Circuit Breaker</b>			
Brand		Schneider	
Model		IC60N Curve B	
Poles		4	
Rated current (In)	A	0,5 - 63	
Thermal release, regulated (It)	A	32	
CB tripping point	A	28.9	28.9
Overload protection (I <sub>r</sub> )	A	3,5 x In	
Fault current protection, residual current release (I <sub>dn</sub> )	A	0,03-30	
Motor Driven DC voltage	V	NA	
Motorized		NA	
Life operating cycles without maintenance		20000	
<b>Terminal Board</b>			
Bolts diameter	mm	10	
Terminal type		Plug	
<b>Sockets Available*</b>			
<b>Sockets 1 Phase</b>			
PIN Domestic (1x) 2p + E 16 A/230 V		OP	
RIN Domestic (1x) 2p + E 16 A/230 V		OP	
CE Domestic (1x) 2p + E 16 A/230 V		OP	
<b>Sockets 3 Phase</b>			
		OP	
Configuration Remarks**		CEE form 3p + N + PE 16 A/400 V CEE form 3p + N + PE 32 A/400 V	

\*Sockets are enable for 50Hz and disable for 60Hz

\*\*For a different configuration/scope contact Atlas Copco support

**STD – Standard; OP – Option; NA – Not Available**





## 7. Options

### QAS 20 Kd S3A

	rpm	1500	1800
<b>Mechanical Options</b>			
<b>Special Equipment</b>			
<b>Spark arrestor</b>			OP
Material			S235 JR G2
<b>Inlet shutdown valve</b>			NA
Design pressure	bar		
Max/Min Temperature	°C		

Spark arrestor is a device that is designed to trap any exhaust particles or combustible materials, such as sparks or other flaming debris, from escaping into hazardous areas where they might cause fires. Exhaust particles are centrifuged in the spark arrestor, then collected and stored in a reservoir until emptied by an operator. An air shut-off valve serves to stop the engine by closing the air intake once the controller detects an over speed in the engine.

<b>Fuel System</b>			
<b>External fuel tank connection</b>			OP
Material			Brass 0011 5204 03
Test pressure	bar		1
Overpressure	bar		2
Open pressure	bar		1±0,1
Max/Min Temperature	°C		-30 to +80
<b>External fuel tank connection with quick coupling</b>			OP

The EFT enable the generator to run for long periods of time on an external fuel supply without having to refuel. We can also provide quick couplings to enable easy and fast connection to the fuel tank

<b>AFT Automatic fuel transfer</b>			NA
<b>Additional fuel filter</b>			STD
Design pressure	bar		
Test pressure	bar		
Volume	l		
Max/Min Temperature	°C		
Max flow rate	g/h		
<b>Skid fuel tank (long autonomy)</b>			NA
Capacity	l		
Material			
<b>Fuel level sender</b> (*Changes automatically for different fuel tank)			STD
<b>Oil level maintainer</b>			NA
Capacity of oil tank			-
<b>Cold start synthetic first oil filling</b>			OP
Type			PAROIL Extra
Temperature (min / max)	°C		-15 to 40°C
Density (Ambient temperature)	g / cc		0,86 (15°C)
<b>Cold flow</b>			Antifreeze fuel additives in 0,2% composition



		QAS 20 Kd S3A	
	rpm	1500	1800
<b>Mechanical Options</b>			
<b>Undercarriage option</b>			
<b>Undercarriage adjustable towbar with brakes</b>		OP	
Number of axles		1	
Permissible mass on each axle	kg	1300	
Maximum speed	km/h	140	
Dimensions (L x W x H)	mm	3370 x 1400 x 1722	
Brake connections		Mechanical	
Wheel	r	14"	
<b>Loose ball coupling</b>		OP	
<b>Adapter 24V road signalization</b>		OP	
<b>Towing eye</b>			
Towing eye DIN		OP	
Towing eye NATO		OP	
Towing eye BALL coupling		OP	
Towing eye ITA		OP	
Towing eye AFR		OP	

Depending on the size, units have a two-wheeled, single axle trailer, or a double axel with 4 wheels. Both types of trailer have an adjustable towbar and road signalization.

<b>Special options</b>		
Special color undercarriage		OP
Special color wheels		OP
Special color canopy		OP
Special color frame		OP
<b>Witness test</b>		
OP		

Guided and face to face testing of the machine. Including Transient test and Heat Run Test.

### Electrical Options

		QAS 20 Kd S3A
<b>Coolant Heater</b>		
<b>Electric driven coolant heater</b>		OP
Voltage	V	240
Power	kW	1
Current	A	4.2
Thermostat Range	°C	38 / 49
<b>Fuel driven coolant heater</b>		NA
Electrical power	W	
Rated voltage	V	
Operating pressure	bar	
Flow rate at 0,1 bar	l/h	

Its main mission is heat the coolant so that the temperature of the engine is always high enough to start straight away, even in temperatures as low as minus 25 degrees Celsius. Not for all models but a fuel powered version is available, which is ideal for remote areas without mains supply.

<b>Frequency and Voltage configuration</b>		
Frequency/Voltage/Phases	50 Hz / 400V / 3ph	STD
Dual frequency switch	50Hz-60Hz	OP
<b>*If the unit is dual frequency, DV and MV versions are NA</b>		
Dedicated frequency	50 Hz 230V 1ph	OP
Dual voltage	50 Hz 400 V 3ph - 230V 3ph (Norway)	OP
Dual voltage	50 Hz 400 3ph - 230V 1ph	OP



**QAS 20 Kd S3A**

		rpm	1500	1800
<b>Electrical Options</b>				
<b>Battery</b>				
<b>Battery charger*</b>			OP	
Temperature	°C		-30 to 55	
Input frequency	Hz		47.....64	
Output voltage	V		12	
Output current	A		5	
Output power	W		60	
Dimensions (L x W x H)	mm		165 x 305 x 110	
<i>Recommendable with Qc2103 and Qc4003</i>				
<b>Battery cut off switch</b>			OP	
Operations	V / A		24 / 1500	

Battery charger is necessary for stand-by applications because the controller is always on, ready to start at any time. Battery cut off switch allows the battery to be disconnected when storing the unit, thus preventing the battery from becoming drained.

<b>Electronic speed regulator (Governor)</b>			STD	
Model				
Connection to engine				
Sensors/Switch	°C and kPa			

<b>Earth Protection</b>				
Neutral TNS			STD	
Neutral EDF (TT)			OP	
Neutral IT			OP	
Earth leakage detection Relay (ELR)			OP	
	mA		30	
Insulation Monitoring Relay			OP	
Earth PIN			STD	
Length	mm		450	

<b>Alternator excitation system</b>				
<b>Permanent magnet (PMG)</b>			NA	
AVR				
Sustained short-circuit current	%			
Time sustained short-circuit current	s			
Operating temperature	°C			
No load voltage	V			
Stator Phase/Phase resistance (20°C)	Ω			
<b>Auxiliary winding</b>			OP	
AVR				
Sustained short-circuit current	%		300% (3x In)	
Time sustained short-circuit current	s		10	

The PMG or Permanent Magnet Generator is a separate device to power the AVR and is ideal for motor starting and distorted loads as provides the generator 3 times its nominal current during 10 seconds. Auxiliary winding system is an extra winding layer in the alternator that provides same benefits than the PMG.

<b>Controllers</b>				
Qc1103			STD	
Qc2103			OP	
Qc4003*			NA	

\*with Qc4003+ PMS Atlas Copco recommends: Battery charger + Coolant heater

\*Just 1 ph socket available

\*Qc4003 includes always communication cables and needed adaptors

Qc1103: is the controller dedicated for island operation or remote start

Qc2103: has in addition the possibility of detect a mains failure

Qc4003: is the high spec controller prepared to work synchronized with several units (IPP) and/or the mains



### CONTROLLERS KEY FEATURES QC 1103 & 2103 CONTROLLERS

**Auto start or automatic mains failure applications**

**Monitoring of electronic or non-electronic engines**  
J1939 as standard

**Gen-set and busbar control & protection**

**Improved inputs/outputs**  
Up to 11 digital inputs, 5 analogue inputs and 8 relay outputs

**Modbus communication rs485**

**Configurable for other applications**  
PARUS configurable

**Graphical display**  
Multi-language



### CONTROLLERS KEY FEATURES QC 4003 CONTROLLER

**Controllers key features Qc 4003**

**Paralleling between generators and mains power supply**

**Full engine monitoring**  
CAN communication J1939

**Gen-set and busbar control & protection**

**Multiple configurable inputs/outputs**

**Modbus communication RTU/RS485**

**Easy software with m-logic programation**  
PARUS 3

**PARALLELING APPLICATIONS**  
Load Take Over, Mains Export/Import, AMF, Peak Shaving, Transformer Maintenance, Fix power and PMS (CAN)

