

This document gives a complete list of technical data with some detailed explanations of the main systems, subsystems and performance of our generators, in order to support local sales documentation, tenders or even technical doubts.

While every effort has been made to ensure that the information in this manual is correct Atlas Copco does not assume responsibility for possible errors. Atlas Copco reserves the right to make changes without prior notice.



### Standard Model Scope

Applying insights gained from industrial customers, rental companies, public utilities and other end users QAS generators are designed to withstand the most demanding on-site conditions and environments.

Considering their impressive performance at full capacity, the QAS line of generators includes excellent features for noise reduction and environmental protection.

QAS generators are purpose built for quick, easy and safe transport and on-site handling. Built to last, a QAS generator will provide years of dependable service for your electrical power generation needs.

All members of the widely appreciated QAS family are intelligent multi-task units managing to power a wide range of electrical equipment in different applications.

Their superior component configuration offers a wide range of control modules, electrical settings and mechanical options, in order to guarantee superior quality at efficient operating costs.

Conceived for 100% prime power operation in the most severe outdoor conditions, ready to work in sensitive areas, QAS generators are designed and configured for safe operation with minimal downtime under any circumstance.

#### Features

- Carefully selected components, accurately developed and tested configuration
- Superior standard configuration and extensive option list
- 500 hours service interval and superior accessibility to all service points
- Compact and safe concept and sturdy design
- Designed and built to last

#### Benefits

- Accurate and stable power regardless of the conditions
- Ability to power a wide range of applications
- Service efficiency: increased up-time
- Increased transport efficiency
- Superior resale value / longer life time

### Manufacturing and Environmental Standards

The QAS range is manufactured following stringent ISO 9001 regulations, and by a fully implemented Environmental Management System fulfilling ISO 14001 requirements.

Attention has been given to ensure minimum negative impact to the environment. The QAS range complies with the latest noise emission directives.

### Declaration of Conformity

Our QAS EC falls under the provisions of the article 12.2 of the EC Directive 2005/42/EC on the approximation of the laws of the Member States relating to machinery, is in conformity with, the relevant Essential Health and Safety Requirements of this directive:

**MACHINERY SAFETY (2006/42/EC):** EN ISO 12100-1, EN ISO 12100-2, UNE EN 12601

**ELECTROMAGNETIC COMPATIBILITY (2004/108/EC):** EN 61000-6-5, EN 61000-6-4

**LOW VOLTAGE EQUIPMENT (2006/95/EC):** EN 60034, EN60204-1, EN 60439

**OUTDOOR NOISE EMISSION (2000/14/EC):** ISO 3744

**ISO 8528:** QAS generators are design to comply with ISO 8528 regulation

*\*Except QAS 250 Stage 2 that has a declaration of conformity non CE*



## 1. Performance Data

Generator		QAS 250 Vod Stage 3A		QAS 250 Vod Stage 2	
Rated speed	rpm	1500	1800	1500	1800
Rated power factor (lagging)		0,8	0,8	0,8	0,8
Rated Prime Power, PRP	kVA	250	250	245	251,1
	kW	200	200	196	200,9
Limited Time Power, ESP (Stand-by)	kVA	275	275	269,5	276,2
	kW	220	220	215,6	221
Continuous Operation Power, COP (Continuous)	kVA	175	175	171,5	175,8
	kW	140	140	137,2	140,6
Rated voltage (3ph. line to line)	V	400	480	400	480
Rated voltage (1ph. line to neutral)	V	230	277	230	277
Rated current 3ph. (PRP)	A	360,8	300,7	353,6	302,0
Rated current 3ph. (ESP)	A	396,9	330,8	389,0	332,2
Maximum sound power level (LWA) complies with 2000/14/EC	dB(A)	97	99	99	103
Maximum sound pressure level (LPA) at 7 m	dB(A)	69	71	71	75
Coupling engine/alternator		Direct		Direct	
Capacity fuel tank (total)	l	469		469	
Fuel tank specifications		Metal		Metal	
Fuel Autonomy at full load (Considering full capacity)	h	9,1	8,4	9,1	8,3
Single step load acceptance (within G2, acc. ISO 8528-5:1993)	%	57	75	60	85
Frequency drop (lower than % isochronous)	%	≤ 0,25	≤ 0,25	≤ 0,25	≤ 0,25
Maxim oil consumption 100% load	l/h	0,05	0,05	0,03	0,03

## Derating Table (%)

	0°C	5 °C	10 °C	15 °C	20 °C	25 °C	30 °C	35 °C	40 °C	45 °C	50 °C
0 m	100	100	100	100	100	100	100	100	100	85	75
500 m	100	100	100	100	100	100	100	100	100	85	75
1000 m	100	100	100	100	100	100	100	100	100	85	75
1500 m	95	95	95	95	95	95	95	95	90	85	75
2000 m	90	90	90	90	90	90	90	90	85	80	75
2500 m	85	85	85	85	85	85	85	85	80	NA	NA
3000 m	80	80	80	80	80	80	80	80	75	NA	NA
3500 m	75	75	75	75	75	75	75	NA	NA	NA	NA
4000 m	70	70	70	70	70	70	70	NA	NA	NA	NA

## Limitations

		QAS 250 Vod Stage 3A	QAS 250 Vod Stage 2
Maximum ambient temperature	°C	50	50
Altitude capability	m	4000	4000
Relative air humidity maximum	%	85	85
Minimum running temperature	°C	-15	-15
Minimum running temperature, with coldstart equipment and opened breather*	°C	-25	-25

\* on high humidity regions freezing may occur on the breather pipes





## Application Data

	QAS 250 Vod Stage 3A	QAS 250 Vod Stage 2
Mode of operation	PRP	PRP
Max. Inclination	+/- 10°	+/- 10°
Operation	single / parallel	single / parallel
Start-up and control mode	manual / auto	manual / auto
Climatic exposure	open air	open air



	rpm	QAS 250 Vod Stage 3A		QAS 250 Vod Stage 2	
		1500	1800	1500	1800
<b>Fuel Consumption at*:</b>					
0% Load	l/h	4,30	6,10	6,32	9,21
10% Load	l/h	8,20	10,10	10,00	14,00
25% Load	l/h	15,90	17,50	18,74	23,13
50% Load	l/h	30,00	31,50	30,12	34,22
75% Load	l/h	40,40	44,10	42,90	49,51
100% Load	l/h	51,40	56,00	51,68	56,30
110% Load	l/h	55,50	58,60	56,00	59,00
<b>Specific Fuel Consumption at:</b>					
0% Load	kg/kWh	NA	NA	NA	NA
10% Load	kg/kWh	0,353	0,434	0,439	0,599
25% Load	kg/kWh	0,273	0,301	0,329	0,396
50% Load	kg/kWh	0,258	0,271	0,264	0,293
75% Load	kg/kWh	0,232	0,253	0,251	0,283
100% Load	kg/kWh	0,221	0,241	0,227	0,241
110% Load	kg/kWh	0,217	0,229	0,223	0,230

\*Diesel fuel type No. 2 diesel or a fuel corresponding to ASTM D2. Density: 0,86 kg/l

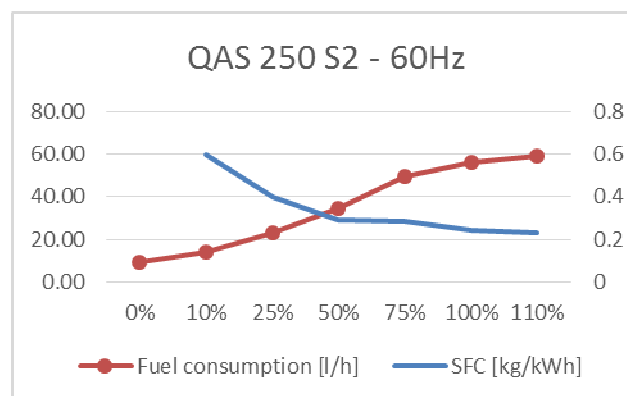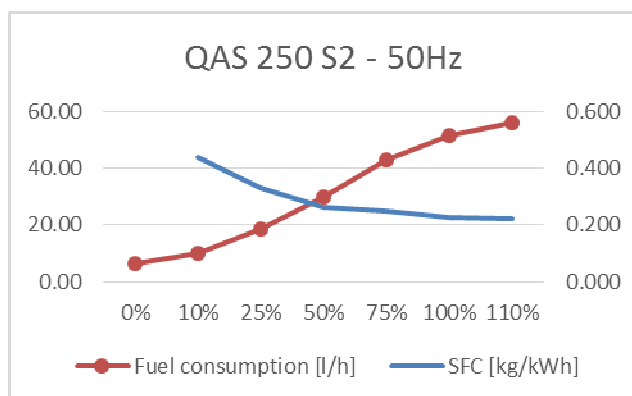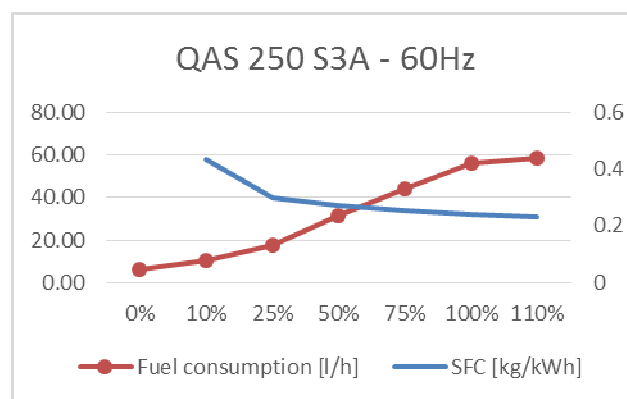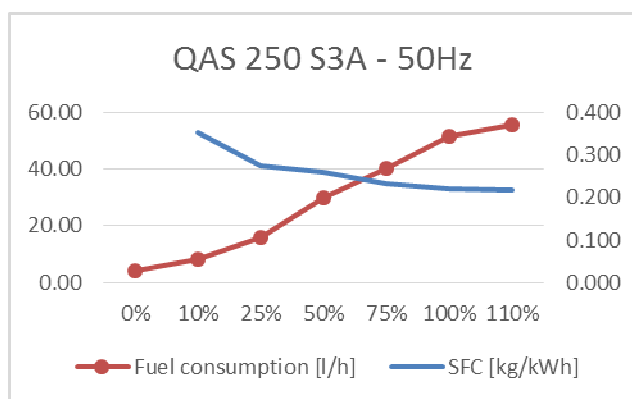


(Reference conditions at 25°C Air Inlet Temperature, 60% Relative Humidity, 1bar Absolute inlet pressure, for different conditions or limitations contact Atlas Copco technical support).



## 2. Box

		QAS 250 Vod Stage 3A		QAS 250 Vod Stage 2	
	rpm	1500	1800	1500	1800
<b>Dimensions (L x W x H)</b>	m	3,77 x 1,2 x 1,87		3,77 x 1,2 x 1,87	
<b>Weight</b>					
Net mass	Kg	3000		3000	
Wet mass	Kg	3393		3393	
<b>Capacity of spillage free frame</b>	l	564.3		556.6	
<b>Dimensions Long autonomy Fuel tank</b>					
		3,77 x 1,2 x 2,2		3,77 x 1,2 x 2,2	
<b>Weight</b>					
Net mass	Kg	3239		3239	
Wet mass	Kg	4474		4474	
<b>Foam silencer</b>					
Thickness	mm	50		50	
Temperature	°C	Min -30 Max 120		Min -30 Max 120	

Our canopies are made from galvanized steel and painted with powder coating paint. To improve the protection in the most exposed parts as frame and lifting beam, it is also primed with a special paint before coating.

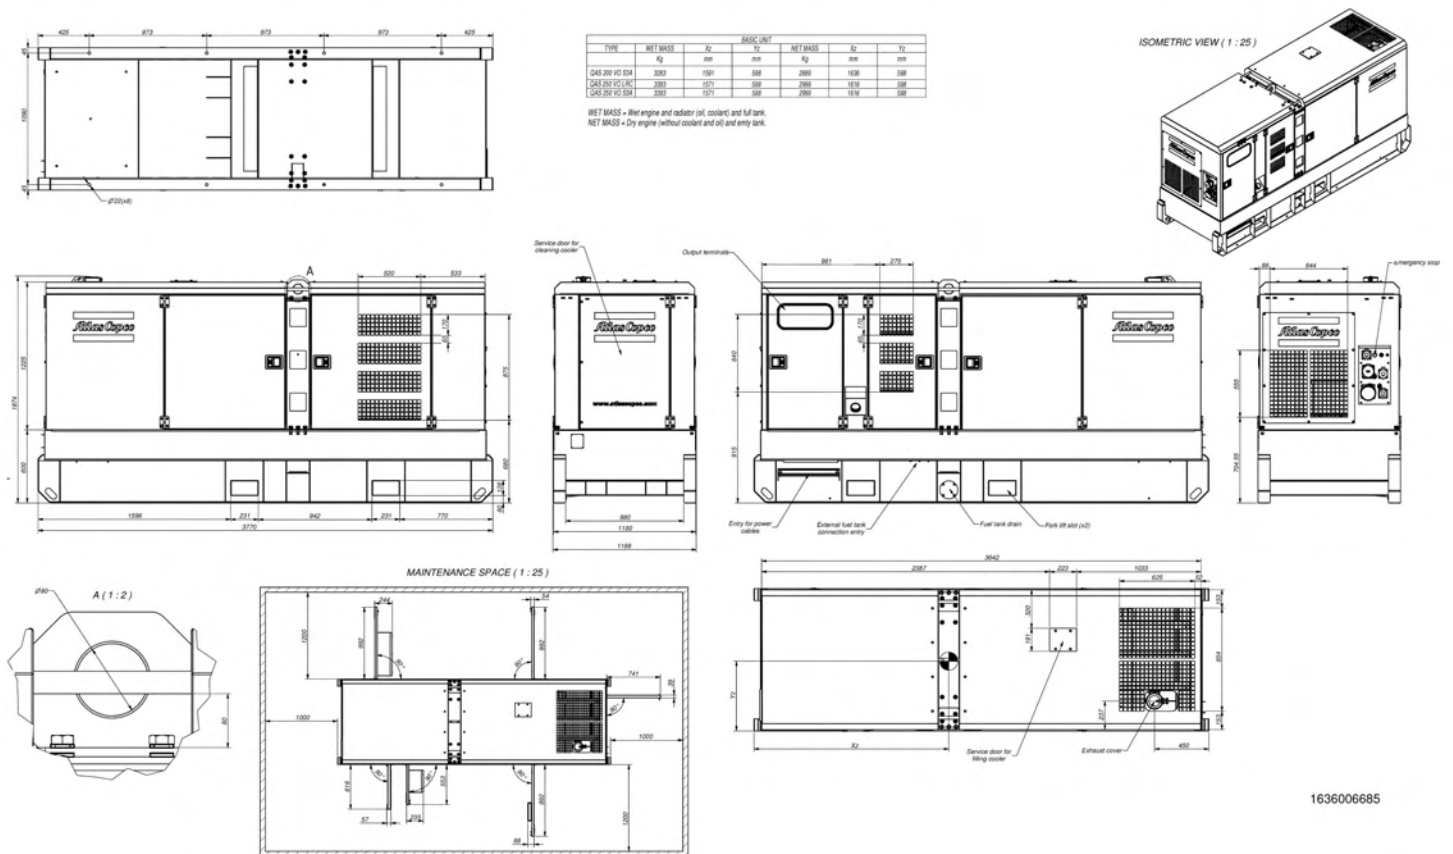

### 3. Engine

	rpm	QAS 250 Vod Stage 3A		QAS 250 Vod Stage 2	
		1500	1800	1500	1800
<b>General</b>					
Manufacturer		Volvo		Volvo	
Model		TAD 754 GE		TAD 734 GE	
Standard		ISO 3046 / ISO 8528-2		ISO 3046 / ISO 8528-2	
Number of cylinders	u.	6		6	
Configuration		6 in line		6 in line	
Aspiration		Turbocharged		Turbocharged	
Speed governor		Volvo Penta EMS-2		Volvo Penta EMS-2	
Bore	mm	108		108	
Stroke	mm	130		130	
Electrical system (DC)	V	24		24	
Compression ratio		17		17	
Displacement (swept volume)	l	7,15		7,15	
Piston speed	m/s	6,7	7,8	6,7	7,8
Combustion system		Direct injection		Direct injection	
Charged air cooling system		Intercooled		Intercooled	
Maximum permissible load factor of PRP during 24h	%	70		70	
<b>Lubrication system</b>					
Type		PAROIL E (Mineral)		PAROIL E (Mineral)	
Capacity of oil system (including filters + sump)	l	34		29	
Oil pressure at rated speed	kPa	300 - 500		420 - 450	
Maximum Lubrication oil temperature	°C	125		130	
<b>Air intake system</b>					
Air consumption 25°C (PRP)	m³/min	12,4	13,9	16,1	18,3
Air consumption 25°C (ESP)	m³/min	12,6	14,3	16,3	18,9
Max allowable air intake restriction	kPa	5		3	
Air filter cleaning efficiency	%	75%		75%	
Air filter capacity	m³/min	18 - 30		18 - 30	
<b>Cooling system</b>					
Coolant		Parcool		Parcool	
Capacity of engine	l	10		8	
Total capacity (radiator, hoses...)	l	34		24	
Fan power consumption at nominal speed	kW	11,3	18,5	11,6	20
Fan material		Plastic		Plastic	
Coolant flow	l/s	4,08	4,92	4,08	4,91
Air mass flow (56°C)	m³/s	4,1	4,2	(63°C) 4	4,4
(61°C)	m³/s	4,7	4,7	(70°C) 5,2	5,7
<b>Fuel filter</b>					
		Water Separator		Water Separator	
Max pressure	bar	1,03		1,03	
Temperature	°C	-		-	
Volume	l	-		-	
Flow Rate	l/h	454		454	
<b>Emission compliance</b>					
		EU STAGE 3A	EU STAGE 3A	EU STAGE 2	EU STAGE 2
No X + HC	g/kWh	3,2 + 0,067	3,19 + 0,04	3800	3800
CO	g/kWh	0,43	0,36	300	300
PM	g/kWh	0,05	0,05	NA	NA
SO2	g/kWh	NA	NA	50	50
CO2 (at optimal working point)	%	NA	9,1	7,59	NA

\*These values are extracted from official engine datasheet.



#### 4. Alternator

	rpm	QAS 250 Vod Stage 3A		QAS 250 Vod Stage 2	
		1500	1800	1500	1800
<b>General</b>					
Manufacturer		Leroy Somer		Leroy Somer	
Model		LSA 46,2 L6		LSA 46,2 L6	
Standard		IEC 34-1 / ISO 8528-3		IEC 34-1 / ISO 8528-3	
Rated net power (ESP: 50Hz 27°C / 60 Hz 40°C)	kVA	275	324	275	324
Number of bearings		1		1	
Number of wires		12		12	
Voltage regulator accuracy		+/- 0.5%		+/- 0.5%	
Degree of protection / Insulation class		IP 23/H		IP 23/H	
Environment Protection		System 2 (Humid atmosphere)		System 2 (Humid atmosphere)	
Number of poles		4		4	
Number phases		3		3	
Over speed	rpm	2250		2250	
Air flow	m³/s	0,43	0,51	0,43	0,51
Total Harmonic Distortion THD		no load < 2,5%- load < 2,5%		no load < 2,5%- load < 2,5%	
Waveform: NEMA = TIF		< 50		< 50	
Xd Direct axis synchro reactance unsaturated	%	327	327	327	327
X'd Direct axis transient reactance saturated	%	15,5	15,5	15,5	15,5
X''d Direct axis subtransient reactance saturated	%	9,3	9,3	9,3	9,3
<b>Excitation system</b>		Shunt		Shunt	
Sustained short-circuit current	%	180% (1,8x In)		180% (1,8x In)	
Time sustained short-circuit current	s	20		20	
<b>AVR</b>					
Model		R 250		R 250	
Sensing		1 phase		1 phase	
Voltage regulation	%	±0.5		±0.5	
Voltage sensing	V	≤ 139V		≤ 139V	

The Leroy Somer LSA alternators are designed for heavy duty continuous applications:


- System 2 protection (relative humidity >95%) for tropical environment (except coastal areas). With high performance dielectric varnish and reinforced over-coating on main stator and rotor
- 4 pole brushless design with single bearing, Class H insulation and IP23 rating
- Voltage regulation +/- 0.5%
- Full Load acceptance of prime power rating
- Standard excitation system is SHUNT (Self excited). As option (check *Electrical options*) you can have additional excitation system as:
  - PMG
  - Auxiliary winding



## 5. Generator

	rpm	QAS 250 Vod Stage 3A		QAS 250 Vod Stage 2	
		1500	1800	1500	1800
<b>Energy Balance</b>					
<b>Engine</b>					
Heat rejection to exhaust	kW	152	158	177	189
Heat rejection to coolant	kW	133	141	117	124
Heat rejection to radiation	kW	23	24	24	25
<b>Alternator</b>					
Efficiency at full load	%	92,40%	93,10%	92.40%	93.10%

## Genset Efficiency

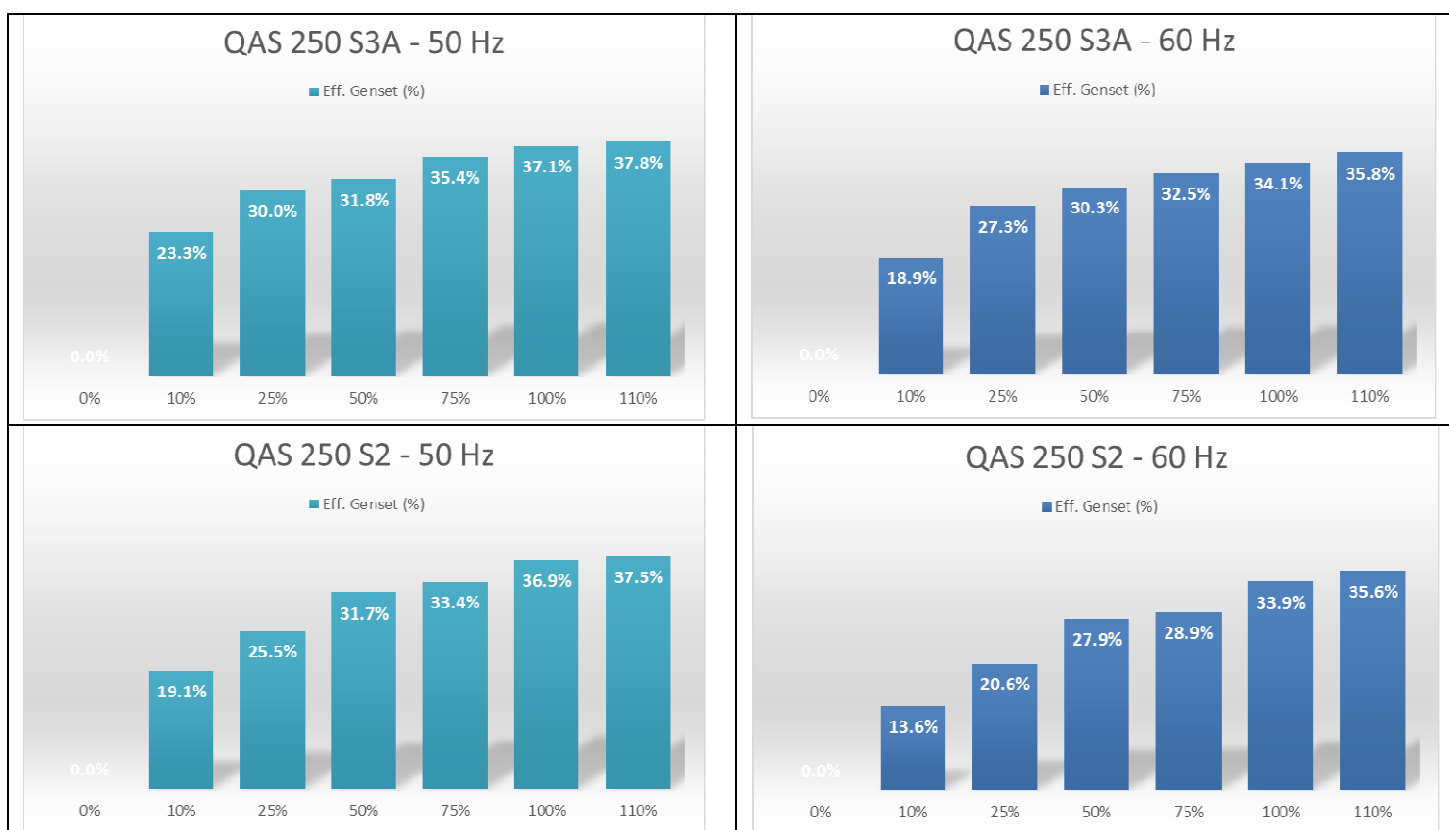

<b>Exhaust System</b>					
Flow (PRP)	m <sup>3</sup> /min	38,4	39,7	33	36,7
Flow (ESP)	m <sup>3</sup> /min	40,3	42,1	33,4	37,9
Exhaust gas temperature "after turbine" (PRP)	°C	515	485	495	475
Exhaust gas temperature "after turbine" (ESP)	°C	550	525	550	510
Max. Backpressure (Without / with spark arrestor)	kPa	7 / TBD	7 / TBD	10 / TBD	10 / TBD
Output pipe diameter	mm	114		114	
<b>Battery</b>					
Quantity		2		2	
Voltage	V	12		12	
Capacity	Ah	143		143	
Connection		Serie		Serie	
Dimensions (L x W x H)	mm	514x218x210		514x218x210	



	rpm	QAS 250 Vod Stage 3A		QAS 250 Vod Stage 2	
		1500	1800	1500	1800
Cold cranking current	A(EN) / A(DIN)	1000 / 540		1000 / 540	
Starting power	kW	7,5		7,5	
Weight (wet)	kg	43,4		43,4	
<b>Sensor</b>					
Oil (temp, pressure & level)		STD		STD	
Coolant (temp & level)		STD		STD	
Fuel (feed pressure)		STD		STD	
Charge air (temp & pressure)		STD		STD	
Fuel Level		STD		STD	
Water in Fuel		STD		STD	
Generator Voltage		STD		STD	
Mains Voltage		OP		OP	
Generator Current transformer		STD		STD	
Transformer Maintenance Changeover feedback		OP		OP	
Reply: Mains CB opened/closed		OP		OP	
Reply: Generator CB opened/closed		OP		OP	
Air Inlet Pressure Switch		STD		STD	
Low Coolant Level Shutdown/Warning		STD		STD	

## 6. Power Output

	rpm	QAS 250 Vod Stage 3A		QAS 250 Vod Stage 2	
		1500	1800	1500	1800
<b>Circuit Breaker</b>					
Brand		Schneider		Schneider	
Model		CVS400F		CVS400F	
Poles		4		4	
Rated current (In)	A	320 - 400		320 - 400	
Thermal release, regulated (It)	A	400		400	
CB tripping point	A	360,8	300,7	360,8	300,7
Overload protection (Ir)	A	3,5 x In		3,5 x In	
Fault current protection, residual current release (I <sub>dn</sub> )	A	0,03-30		0,03-30	
Motor Driven DC voltage	V	24		24	
Motorized		Standard with Qc4003		STD with Qc4003	
Life operating cycles without maintenance		15000		15000	
<b>Terminal Board</b>					
Bolts diameter	mm	15		15	
Terminal type		Platen		Platen	
<b>Sockets Available*</b>					
<b>Sockets 1 Phase</b>					
PIN Domestic (1x) 2p + E 16 A/230 V		OP		OP	
RIN Domestic (1x) 2p + E 16 A/230 V		OP		OP	
CE Domestic (1x) 2p + E 16 A/230 V		OP		OP	
<b>Sockets 3 Phase</b>					
		OP		OP	
Configuration Remarks**		CEE form 3p + N + PE 16 A/400 V		CEE form 3p + N + PE 16 A/400 V	
		CEE form 3p + N + PE 32 A/400 V		CEE form 3p + N + PE 32 A/400 V	
		CEE form 3p + N + PE 63 A/400 V		CEE form 3p + N + PE 63 A/400 V	
		CEE form 3p + N + PE 125 A/400 V		CEE form 3p + N + PE 125 A/400 V	

\*Sockets are enable for 50Hz and disable for 60Hz

\*\*For a different configuration/scope contact Atlas Copco support

**STD – Standard; OP – Option; NA – Not Available**







## 7. Options

	rpm	QAS 250 Vod Stage 3A		QAS 250 Vod Stage 2	
		1500	1800	1500	1800
<b>Mechanical Options</b>					
<b>Special Equipment</b>					
<b>Spark arrestor</b>			OP		OP
Material			S235 JR G2		S235 JR G2
<b>Inlet shutdown valve</b>			OP		OP
Design pressure	bar		13,8		13,8
Max/Min Temperature	°C		93		93

Spark arrestor is a device that is designed to trap any exhaust particles or combustible materials, such as sparks or other flaming debris, from escaping into hazardous areas where they might cause fires. Exhaust particles are centrifuged in the spark arrestor, then collected and stored in a reservoir until emptied by an operator. An air shut-off valve serves to stop the engine by closing the air intake once the controller detects an over speed in the engine.

<b>Fuel System</b>					
<b>External fuel tank connection</b>		STD		STD	
Material			Brass 0011 5204 03		Brass 0011 5204 03
Test pressure	bar		1		1
Overpressure	bar		2		2
Open pressure	bar		1±0,1		1±0,1
Max/Min Temperature	°C		-30 to +80		-30 to +80
<b>External fuel tank connection with quick coupling</b>			OP		OP

The EFT enable the generator to run for long periods of time on an external fuel supply without having to refuel. We can also provide quick couplings to enable easy and fast connection to the fuel tank

<b>AFT Automatic fuel transfer</b>			NA		NA
<b>Additional fuel filter</b>			STD		STD
Design pressure	bar		1,2		1,2
Test pressure	bar		1,8		1,8
Volume	l		2,6		2,6
Max/Min Temperature	°C		-40 to 121		-40 to 121
Max flow rate	g/h		90		90
<b>Skid fuel tank (long autonomy)</b>			OP		OP
Capacity	l		1470		1470
Material			Metal		Metal
<b>Fuel level sender</b>			STD		STD
(*Changes automatically for different fuel tank)					
<b>Oil level maintainer</b>			NA		NA
Capacity of oil tank			-		-
<b>Cold start synthetic first oil filling</b>			STD		STD
Type			PAROIL Extra		PAROIL Extra
Temperature (min / max)	°C		-15 to 40°C		-15 to 40°C
Density (Ambient temperature)	g / cc		0,86 (15°C)		0,86 (15°C)
<b>Cold flow</b>			Antifreeze fuel additives in 0,2% composition		



	rpm	QAS 250 Vod Stage 3A		QAS 250 Vod Stage 2	
		1500	1800	1500	1800
<b>Mechanical Options</b>					
<b>Undercarriage option</b>					
<b>Undercarriage adjustable towbar with brakes</b>		NA		NA	
Number of axles					
Permissible mass on each axle	kg				
Maximum speed	km/h				
Dimensions (L x W x H)	mm				
Brake connections					
Wheel	r				
<b>Loose ball coupling</b>		NA		NA	
<b>Adapter 24V road signalization</b>		NA		NA	
<b>Towing eye</b>					
Towing eye DIN		NA		NA	
Towing eye NATO		NA		NA	
Towing eye BALL coupling		NA		NA	
Towing eye ITA		NA		NA	
Towing eye AFR		NA		NA	

Depending on the size, units have a two-wheeled, single axle trailer, or a double axel with 4 wheels. Both types of trailer have an adjustable towbar and road signalization.

<b>Special options</b>					
Special color undercarriage		NA		NA	
Special color wheels		NA		NA	
Special color canopy		OP		OP	
Special color frame		OP		OP	
<b>Witness test</b>		OP		OP	

Guided and face to face testing of the machine. Including Transient test and Heat Run Test.

### Electrical Options

		QAS 250 Vod Stage 3A		QAS 250 Vod Stage 2	
<b>Coolant Heater</b>					
<b>Electric driven coolant heater</b>		OP		OP	
Voltage	V	240		240	
Power	kW	1		1	
Current	A	4,2		4,2	
Thermostat Range	°C	38 / 49		38 / 49	
<b>Fuel driven coolant heater</b>		NA		NA	
Electrical power	W				
Rated voltage	V				
Operating pressure	bar				
Flow rate at 0,1 bar	l/h				

Its main mission is heat the coolant so that the temperature of the engine is always high enough to start straight away, even in temperatures as low as minus 25 degrees Celsius. Not for all models but a fuel powered version is available, which is ideal for remote areas without mains supply.

<b>Frequency and Voltage configuration</b>					
Frequency/Voltage/Phases		50 Hz / 400V / 3ph		NA	
Dual frequency switch		50Hz-60Hz		STD	
<b>*If the unit is dual frequency, DV and MV versions are NA</b>					
Dedicated frequency		50 Hz 230V 1ph		NA	
Dual voltage		50 Hz 400 V 3ph - 230V 3ph (Norway)		NA	
Dual voltage		50 Hz 400 3ph - 230V 1ph		NA	



		QAS 250 Vod Stage 3A		QAS 250 Vod Stage 2	
	rpm	1500	1800	1500	1800
<b>Electrical Options</b>					
<b>Battery</b>					
<b>Battery charger*</b>		OP		OP	
Temperature	°C	-20 to 70		-20 to 70	
Input frequency	Hz	47.....63		47.....63	
Output voltage	V	24		24	
Output current	A	10		10	
Output power	W	240		240	
Dimensions (L x W x H)	mm	205 x 123 x 86		205 x 123 x 86	
<i>Recommendable with Qc2103 and Qc4003</i>					
<b>Battery cut off switch</b>		OP		OP	
Operations	V / A	24 / 1500		24 / 1500	
Battery charger is necessary for stand-by applications because the controller is always on, ready to start at any time. Battery cut off switch allows the battery to be disconnected when storing the unit, thus preventing the battery from becoming drained.					
<b>Electronic speed regulator (Governor)</b>		STD		STD	
Model		Engine Management System (EMS 2)		Engine Management System (EMS 2)	
Connection to engine		CAN SAE J1939		CAN SAE J1939	
Sensors/Switch	°C and kPa	Lubrication, cooling and fuel system		Lubrication, cooling and fuel system	
<b>Earth Protection</b>					
Neutral TNS		STD		STD	
Neutral EDF (TT)		OP		OP	
Neutral IT		NA		NA	
Earth leakage detection Relay (ELR)		STD		STD	
	mA	30		30	
Insulation Monitoring Relay		OP		OP	
Earth PIN		STD		STD	
Length	mm	950		950	
<b>Alternator excitation system</b>					
<b>Permanent magnet (PMG)</b>		OP		OP	
AVR		R 450 M		R 450 M	
Sustained short-circuit current	%	300% (3x In)		300% (3x In)	
Time sustained short-circuit current	s	10		10	
Operating temperature	°C	-20°C to +70°C		-20°C to +70°C	
No load voltage	V	125	150	125	150
Stator Phase/Phase resistance (20°C)	Ω	2,1		2,1	
<b>Auxiliary winding</b>		NA		NA	
AVR					
Sustained short-circuit current	%				
Time sustained short-circuit current	s				
The PMG or Permanent Magnet Generator is a separate device to power the AVR and is ideal for motor starting and distorted loads as provides the generator 3 times its nominal current during 10 seconds. Auxiliary winding system is an extra winding layer in the alternator that provides same benefits than the PMG.					
<b>Controllers</b>					
Qc1103		STD		STD	
Qc2103		OP		OP	
Qc4003*		OP		OP	

\*with Qc4003+ PMS Atlas Copco recommends: Battery charger + Coolant heater

\*Just 1 ph socket available

\*Qc4003 includes always communication cables and needed adaptors

Qc1103: is the controller dedicated for island operation or remote start

Qc2103: has in addition the possibility of detect a mains failure

Qc4003: is the high spec controller prepared to work synchronized with several units (IPP) and/or the mains



## CONTROLLERS KEY FEATURES QC 1103 & 2103 CONTROLLERS

**Auto start or automatic mains failure applications**

**Monitoring of electronic or non-electronic engines**

J1939 as standard

**Gen-set and busbar control & protection**

**Improved inputs/outputs**

Up to 11 digital inputs, 5 analogue inputs and 8 relay outputs

**Modbus communication rs485**

**Configurable for other applications**

PARUS configurable

**Graphical display**

Multi-language



## CONTROLLERS KEY FEATURES QC 4003 CONTROLLER

**Controllers key features Qc 4003**

**Paralleling between generators and mains power supply**

**Full engine monitoring**

CAN communication J1939

**Gen-set and busbar control & protection**

**Multiple configurable inputs/outputs**

**Modbus communication RTU/RS485**

**Easy software with m-logic**

programation

PARUS 3

**PARALLELING APPLICATIONS**

Load Take Over, Mains Export/Import, AMF, Peak Shaving, Transformer Maintenance, Fix power and PMS (CAN)

