

The NPE 200-40-150HP is a robust, reliable and high performance pumping solution capable of handling the harshest of conditions with ease. Renowned for it's durability and performance, the NPE 200-40-150HP pump is the right choice when you need a solution that will deliver day-in and day-out.

FEATURES

- ✔ Heavy-duty construction
- ✔ Lower maintenance costs
- ✔ Super fast and strong
- ✔ Stainless Steel shaft sleeve
- ✔ Dual Axle Mine Spec Trailer
- ✔ Powered by Cummins Engine
- ✔ Corrosion and abrasion resistant impeller

SPECIFICATIONS

ENGINE SPECIFICATION	
ENGINE	Cummins QSB6.7
PUMP SPECIFICATION	
MIN FLOW	56 L/s
MAX FLOW	236 L/s
DISCHARGE SIZE	200 mm
SUCTION SIZE	200 mm
SOLIDS HANDLING	85 mm
MAX SPEED	1900 RPM
SHUT-OFF HEAD	69 m
BEP HEAD	46 m
BEP FLOW	193 L/s
BEP EFFICIENCY	77%

MATERIALS OF CONSTRUCTION	
WEAR RING	CAST IRON
IMPELLER	CA6NM
VOLUTE	DUCTILE IRON
SHAFT	17-4 PH STAINLESS STEEL
SHAFT SLEEVE	416 STAINLESS STEEL
BACKPLATE	DUCTILE IRON
MECHANICAL SEAL	TUNGSTEN CARBIDE VS. SILICON CARBIDE
O-RINGS	SILICON CARBIDE
BEARING FRAME	F18DB CAST IRON
PUMPSET DIMENSIONS	
LENGTH	TBC to suit
WIDTH	TBC to suit
HEIGHT	TBC to suit



MINING



FLOOD
MANAGEMENT




CIVIL



MUNICIPAL



OIL AND GAS

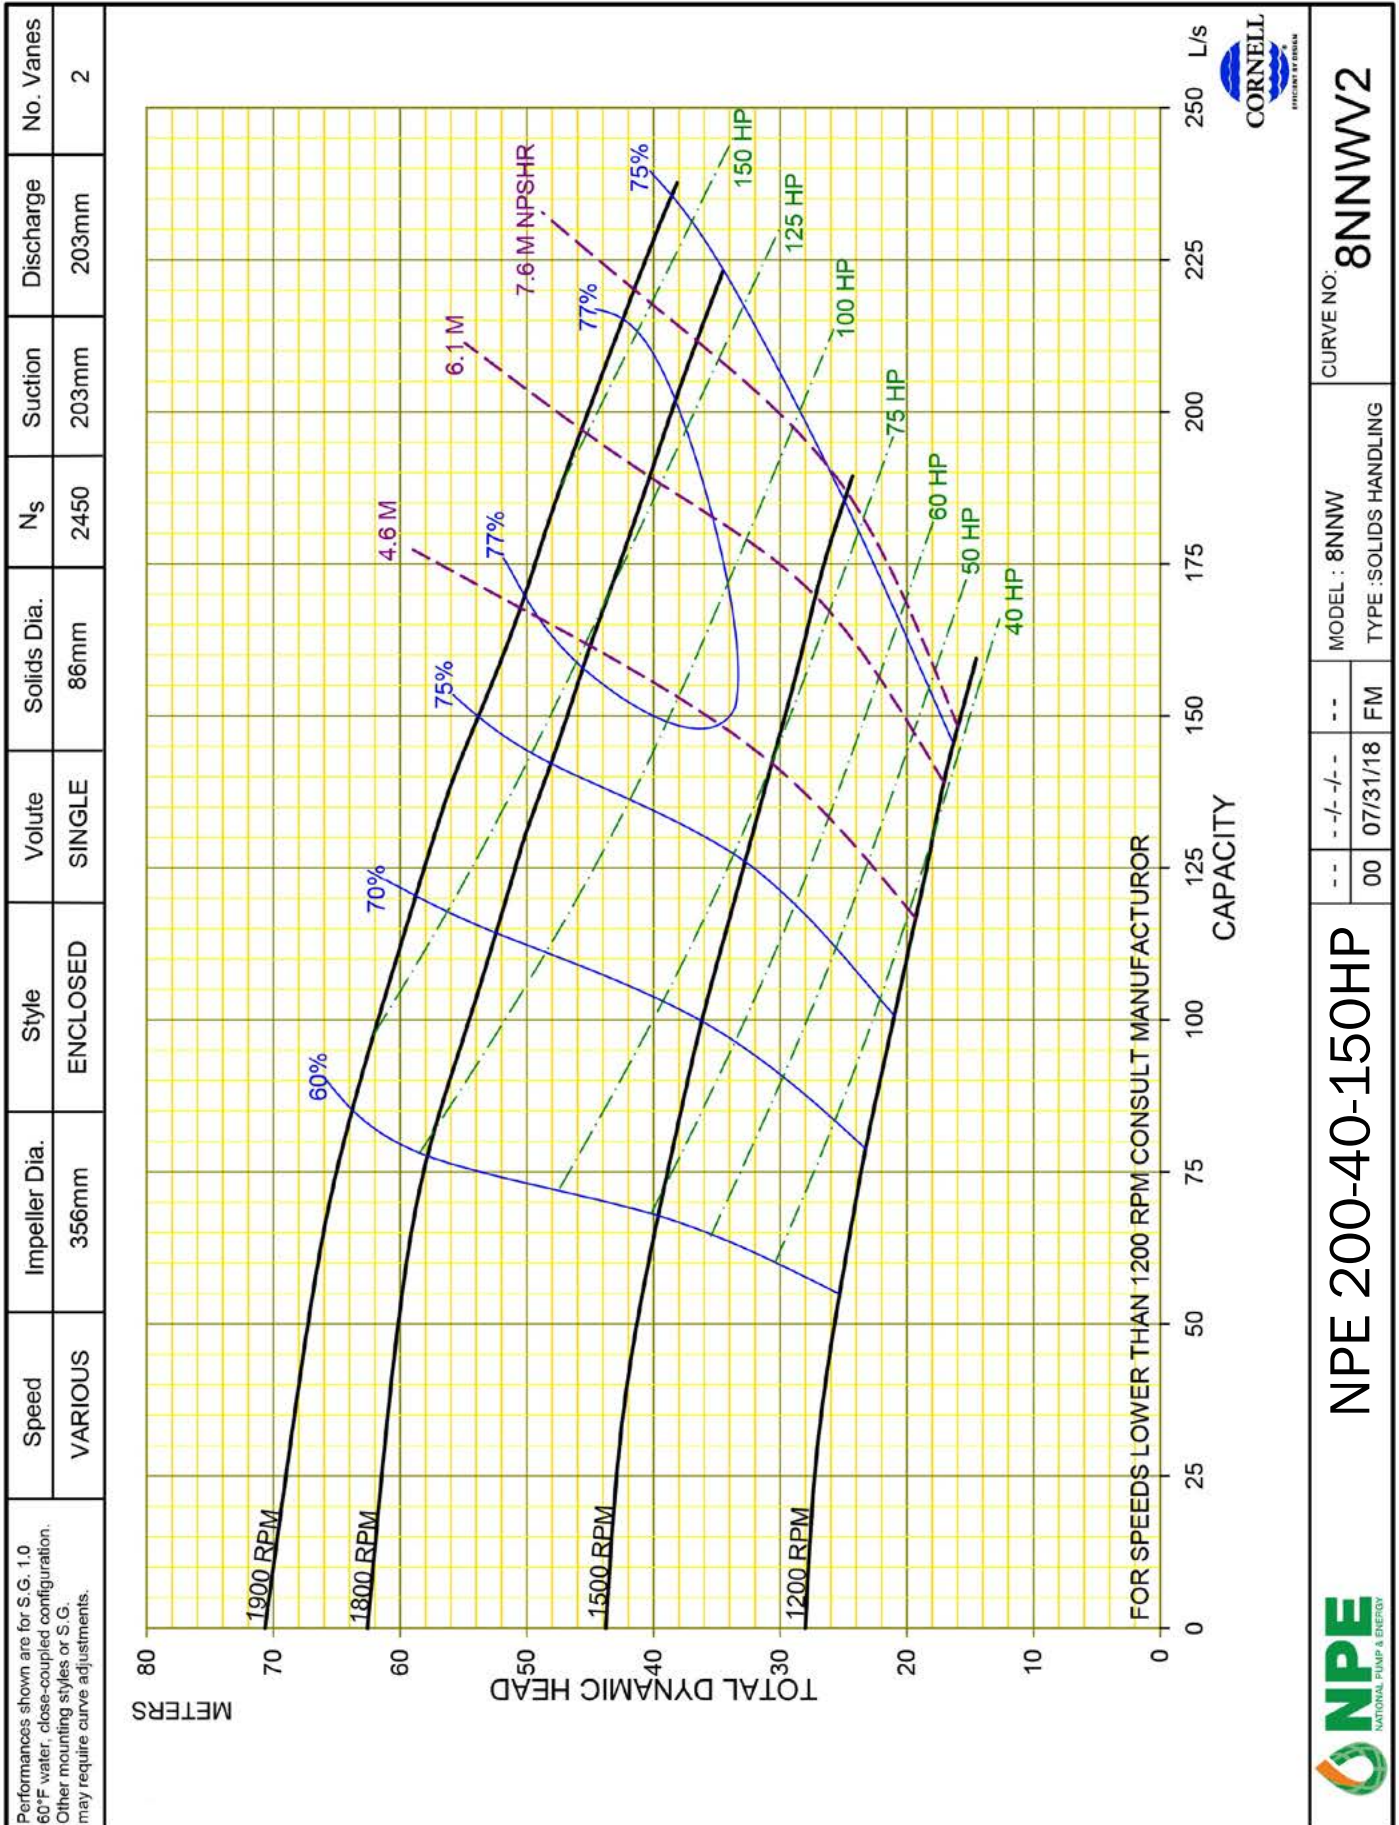

NPE 200-40-150HP

MODEL : 8NNW
TYPE : SOLIDS HANDLING

CURVE NO: **8NNWV2**

