

WEDA L40 (50 Hz)

Product reference sheet


The WEDA slurry pumps are the toughest and have the largest apertures to facilitate handling of slurry with the most challenging solids. These pumps are specially designed to operate in quarries, dredging and settling ponds, dealing with abrasive media with high solids content.

Product code	Weda L40N
Installation	Portable
Discharge connection	3" (75 mm) hose/NPT
Hydraulic range	N - normal head
Solid handling	Max. solids 20 mm 0.8 in
Liquid temperature	max 35°C (95°F) , standard
pH of the pumped liquid	4-10
Number of poles	4
Insulation class	H
Protection class	IP68
Thermal contacts	110°C (230°F)
Cable	H07RN-F 4G10/SOOW 4xAWG6
Cable length	20 m (65 ft)
Outer casing	CI Alloy
Impeller	Cr Alloy CI
Wear parts	Cr Alloy CI
Stator housing	CI Alloy
Strainer	CI Alloy
Shaft	Stainless steel
O-rings	Viton
Discharge connection	CI Alloy
Bearings	Heavy Duty Bearings
Motor side seals	1 mechanical seal (silicon carbide in oil bath)
Impeller side seals	1 mechanical seal (silicon carbide in oil bath) + 4 lip seal (2 BUNA + 2 TPU)
Discharge	Type Hose
Start type	Direct-on-line


Weight and dimensions	Weda L40N
Weight (excl. cable)	185 kg
Height	793 mm
Width	388 mm
Diameter	337 mm



Performance curve

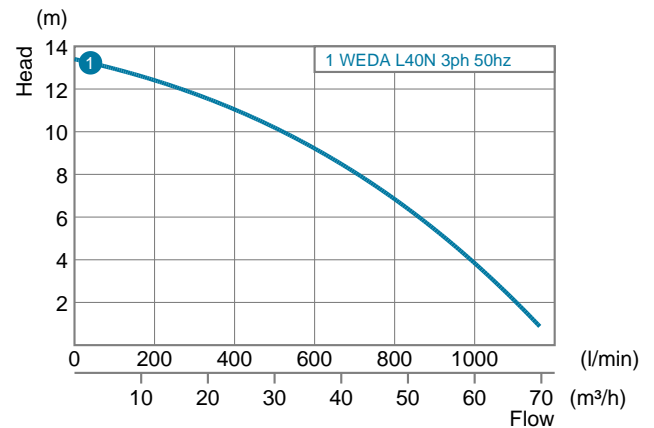

Power rating

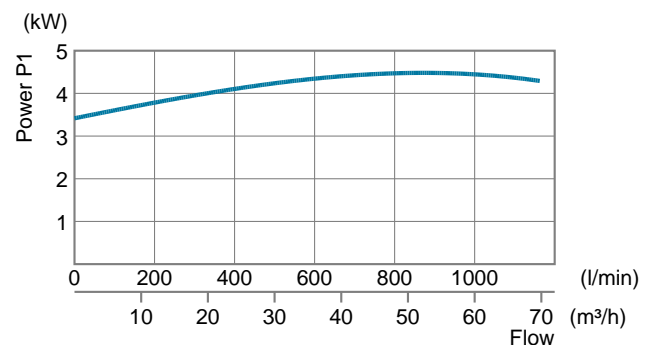

Rating	3 ph
Power P ₁	4.5 kW
Power P ₂	3.7 kW
230 V	15.1 A
400 V	8.7 A
Shaft speed	1450 r.p.m.
Other voltages on request	

NPE-MAR-SS-59

(2022-02-23) 2960 3040 00 rev 1 2021.06 - Subject to modifications without prior notice

1800 PUMP RENTAL

nationalpump.com.au | sales@nationalpump.com.au



NPE

NATIONAL PUMP & ENERGY