

QC 150M - 150MM ENCLOSED AUTOMATIC PRIMING PUMP



EC SHEET

The SPP AUTOPRIME QC 150M pump is a fully enclosed diesel driven pump unit with high efficiency, designed to pump most liquids including sewage and semi solids. The enclosure provides sound reduction and security for use in noise sensitive areas.

Typical uses include removal of ground and rain water from excavations, trenches, footings, manholes and ponds. May also be used for stream and pipe diversions and flood water control, well point dewatering, pipe relining and sludge pumping.

KEY FEATURES

- Bunded unit on optional two-wheel road trailer or skid
- 12 volt battery starting by key switch with optional automatic stop/start capability
- Pump will pass solids up to 65mm diameter and 80mm long
- Reliable double mechanical seals which allow dry running
- Pump can be left running when liquid is exhausted and will prime automatically when liquid is present
- Rugged construction requires minimal operator maintenance
- 65 cfm vacuum pump with coalescer to filter exhaust air before emission into the atmosphere
- Features efficient 'Smartprime' technology for energy saving and reliability

PUMP SPECIFICATIONS	
Flow Rate	400 m3/h Maximum 1200 x 2320 x 1480 mm 44 x 91 x 58 "
Discharge Head	36 m Maximum
Working Pressure	10 bar Maximum
Suction Hose	Size 200 mm (8 in) Diameter
Delivery Hose Size	150 mm (6 in) Diameter
Max Solids	Size 65mm Diameter x 80 mm
Pump Casing	Cast Iron
Impeller	SG Iron
Pump Shaft	Stainless Steel
Wear Plates	SG Iron
Suction Sump	Cast Iron
Shaft Seal	Silicon Carbide/Silicon Carbide
Elastomer	Viton
Diesel Engine	CAT C2.2N
Starting	12 Volt Battery by Key Switch
Sound Pressure Level	65 dB(A) at 7 metres
Fuel Tank Capacity	220 litres












QC 150M - 150MM ENCLOSED AUTOMATIC PRIMING PUMP

PUMP PERFORMANCE CURVE

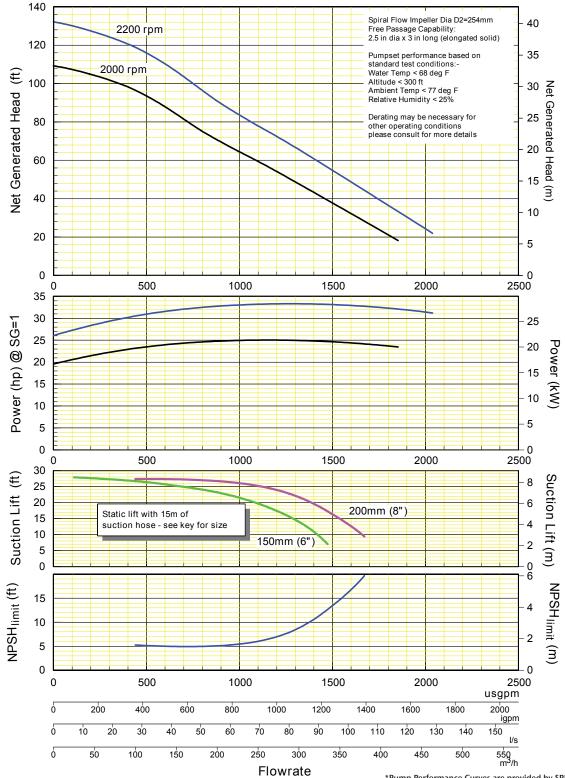

^{*}Pump Performance Curves are provided by SPP Pumps Ltd and may be subject to change without notice.



SPEC SHEET



QC 150M - 150MM ENCLOSED AUTOMATIC PRIMING PUMP

PUMP DIMENSIONS

